

8 7 6 5 4 3 2 1

ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D4436-041	AFT BRACKET ASSEMBLY
2	1	D4435-043	BRACKET ASSEMBLY
3	1	D4436-043	AFT OUTBOARD BRACKET ASSEMBLY
4	1	D4436-045	AFT INBOARD BRACKET ASSEMBLY
5	1	D4440-1	GROMMET
6	4	AN525-832R6	SCREW

D

D

C


C

B

B

A

A

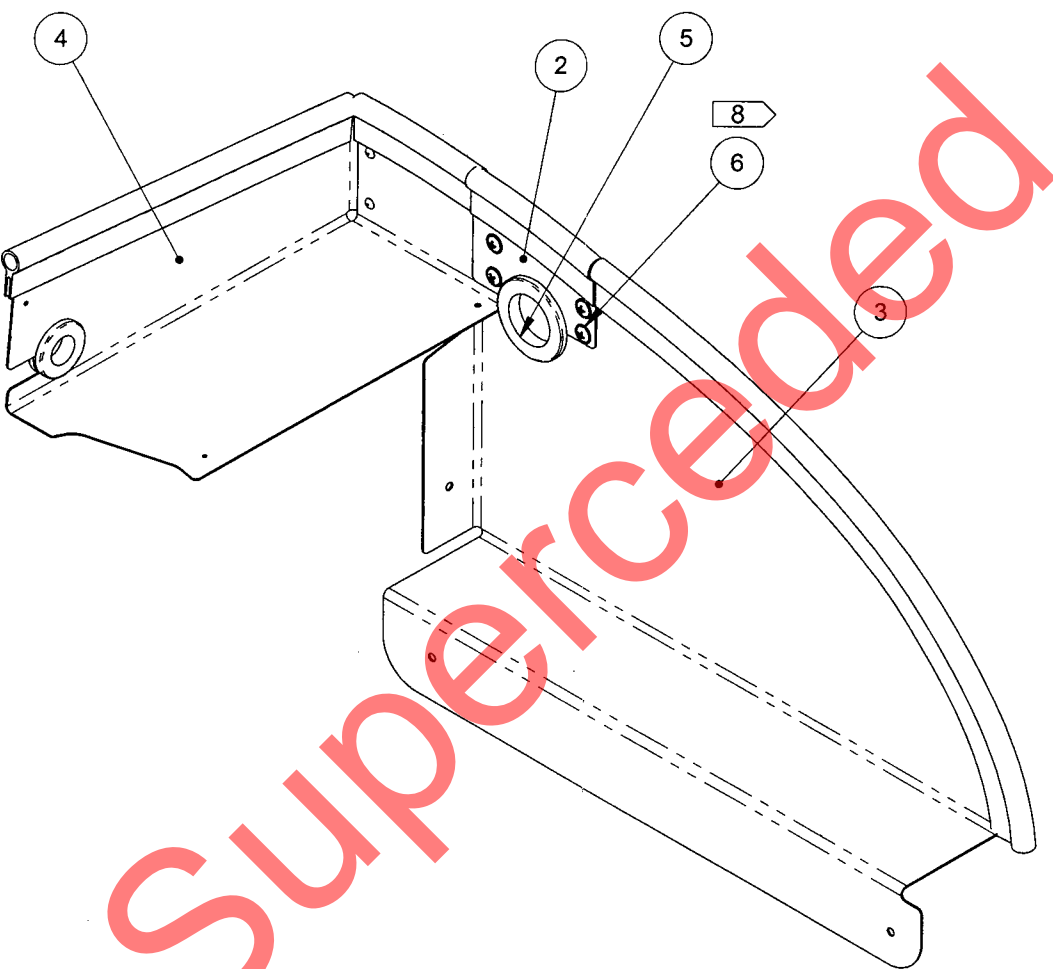

D4436-041 AFT BRACKET ASSEMBLY


RELEASED
12 2012 -01- 23
MP

- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: N/A
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 - 7) WEIGHT: 1.31 lbs
 - 8) TORQUE SCREW TO 12-15 (in-lb)

A	NEW ISSUE	RF	12.01.17
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RF	D4436	SHEET 1 OF 7
APPROVED	RF	TITLE	SCALE
DE APPR.	RF	COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

8 7 6 5 4 3 2 1

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D4436-043	AFT OUTBOARD BRACKET ASSEMBLY
2	1	D4436-1	BRACKET
3	1	D4441-1-160	RUBBER SEAL
4	4	MS20426AD3-2	RIVET
5	2	MS21075L08	NUT PLATE
6	A/R	3M 1300/1300L	ADHESIVE

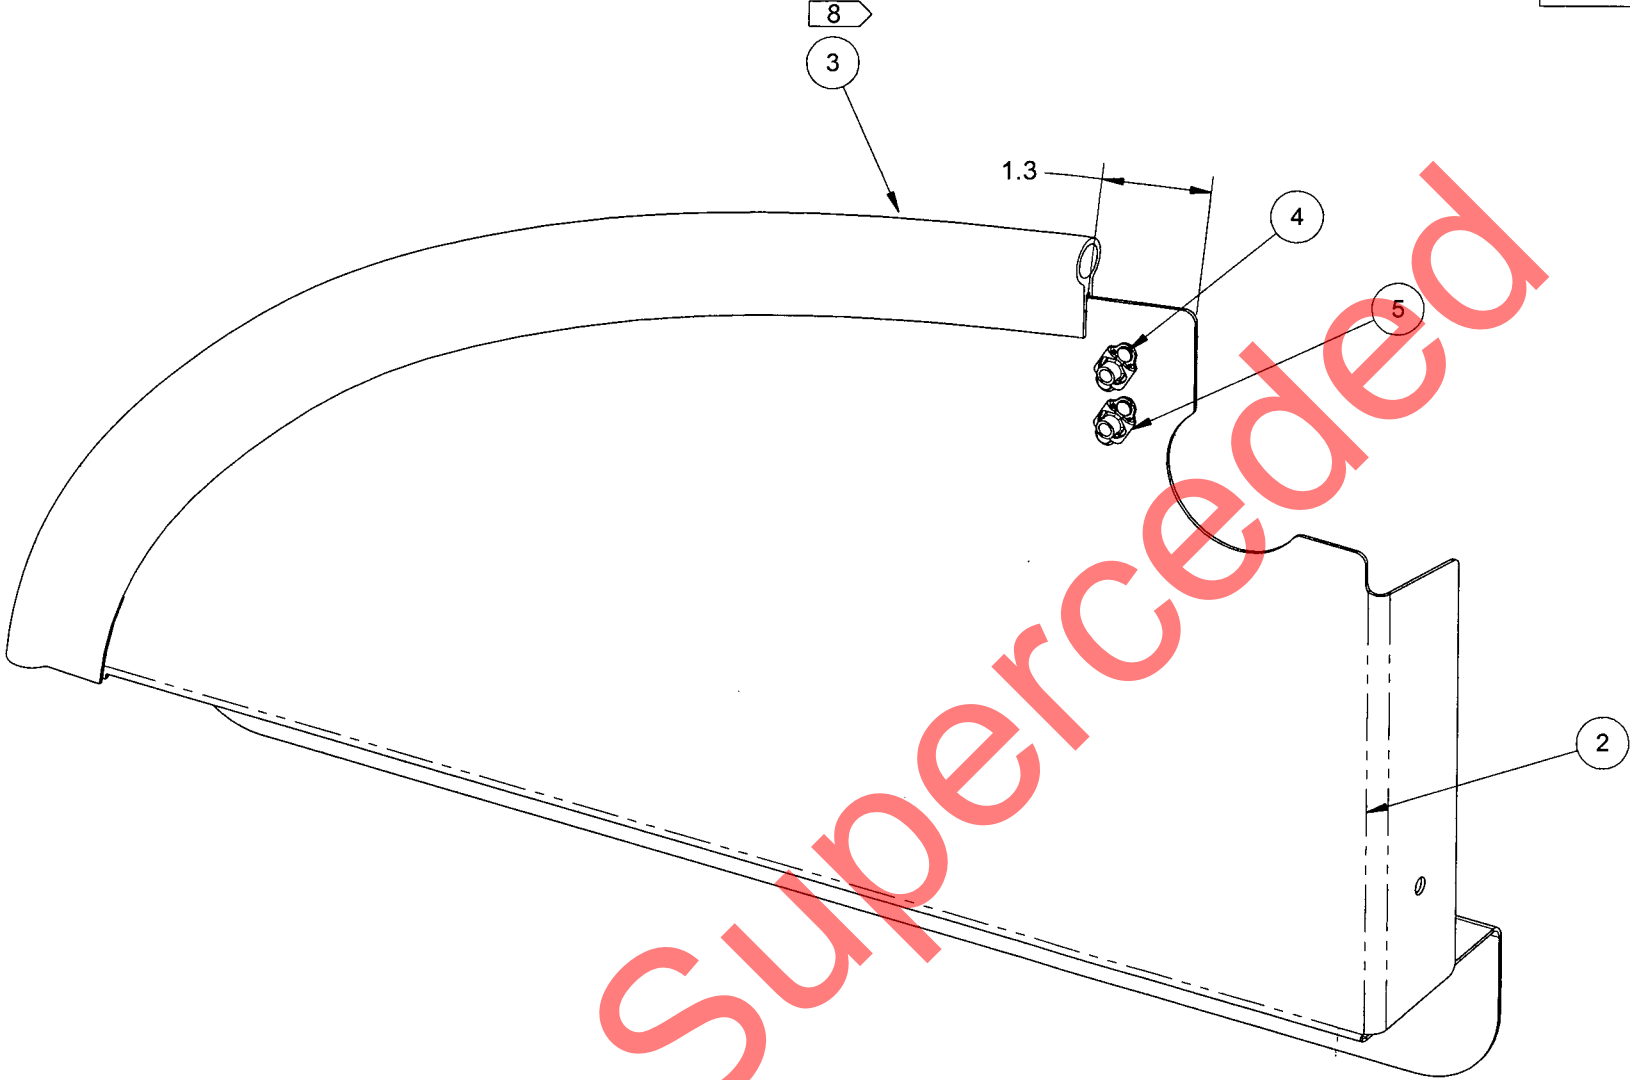


D4436-043 AFT OUTBOARD BRACKET ASSEMBLY

- NOTES:**
- 1) MATERIAL: N/A
 - 2) FINISH: POWDER COAT "BLACK SANDTEX" (4.3.5.7) PER DART QSI 005 4.3 MASK NUT PLATE HOLES
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.78 lbs
 - 8) INSTALL RUBBER SEAL TO EDGE OF PART AFTER POWDER COAT USING 3M 1300/1300L ADHESIVE ENSURE BRACKET IS COMPLETELY INSERTED INTO GROOVE OF RUBBER SEAL. IT IS ACCEPTABLE TO NOTCH THE SEAL AS REQUIRED TO PREVENT IT FROM BUCKLING

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. A
MFG. APPR.	<i>[Signature]</i>	D4436	SHEET 2 OF 7
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	


ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D4436-045	AFT INBOARD BRACKET ASSEMBLY
2	1	D4436-3	BRACKET
3	1	D4441-1-038	RUBBER SEAL
4	1	D4441-1-100	RUBBER SEAL
5	4	MS20426AD3-2	RIVET
6	2	MS20470AD4-3	RIVET
7	2	MS21075L08	NUT PLATE
8	1	MS35489-19	GROMMET
9	A/R	3M 1300/1300L	ADHESIVE

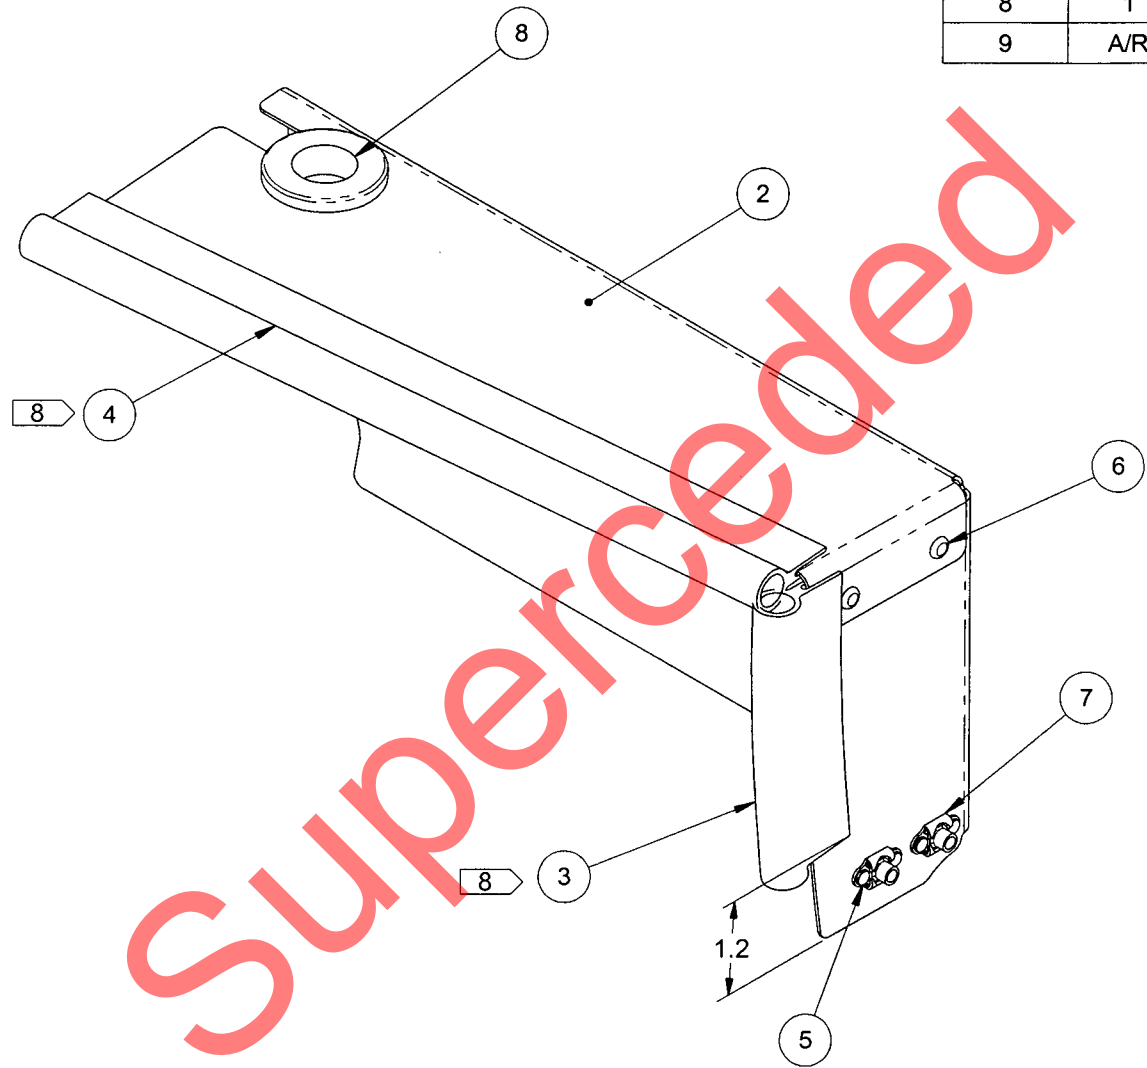

D4436-045 AFT INBOARD BRACKET ASSEMBLY

- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: POWDER COAT "BLACK SANDEX" (4.3.5.7) PER DART QSI 005 4.3 MASK NUT PLATE HOLES
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.42 lbs
 - 8) INSTALL RUBBER SEAL TO EDGE OF PART AFTER POWDER COAT USING 3M 1300/1300L ADHESIVE, ENSURE BRACKET IS COMPLETELY INSERTED INTO GROOVE OF RUBBER SEAL. IT IS ACCEPTABLE TO NOTCH THE SEAL AS REQUIRED TO PREVENT IT FROM BUCKLING

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. A
MFG. APPR.	<i>[Signature]</i>	D4436	SHEET 3 OF 7
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

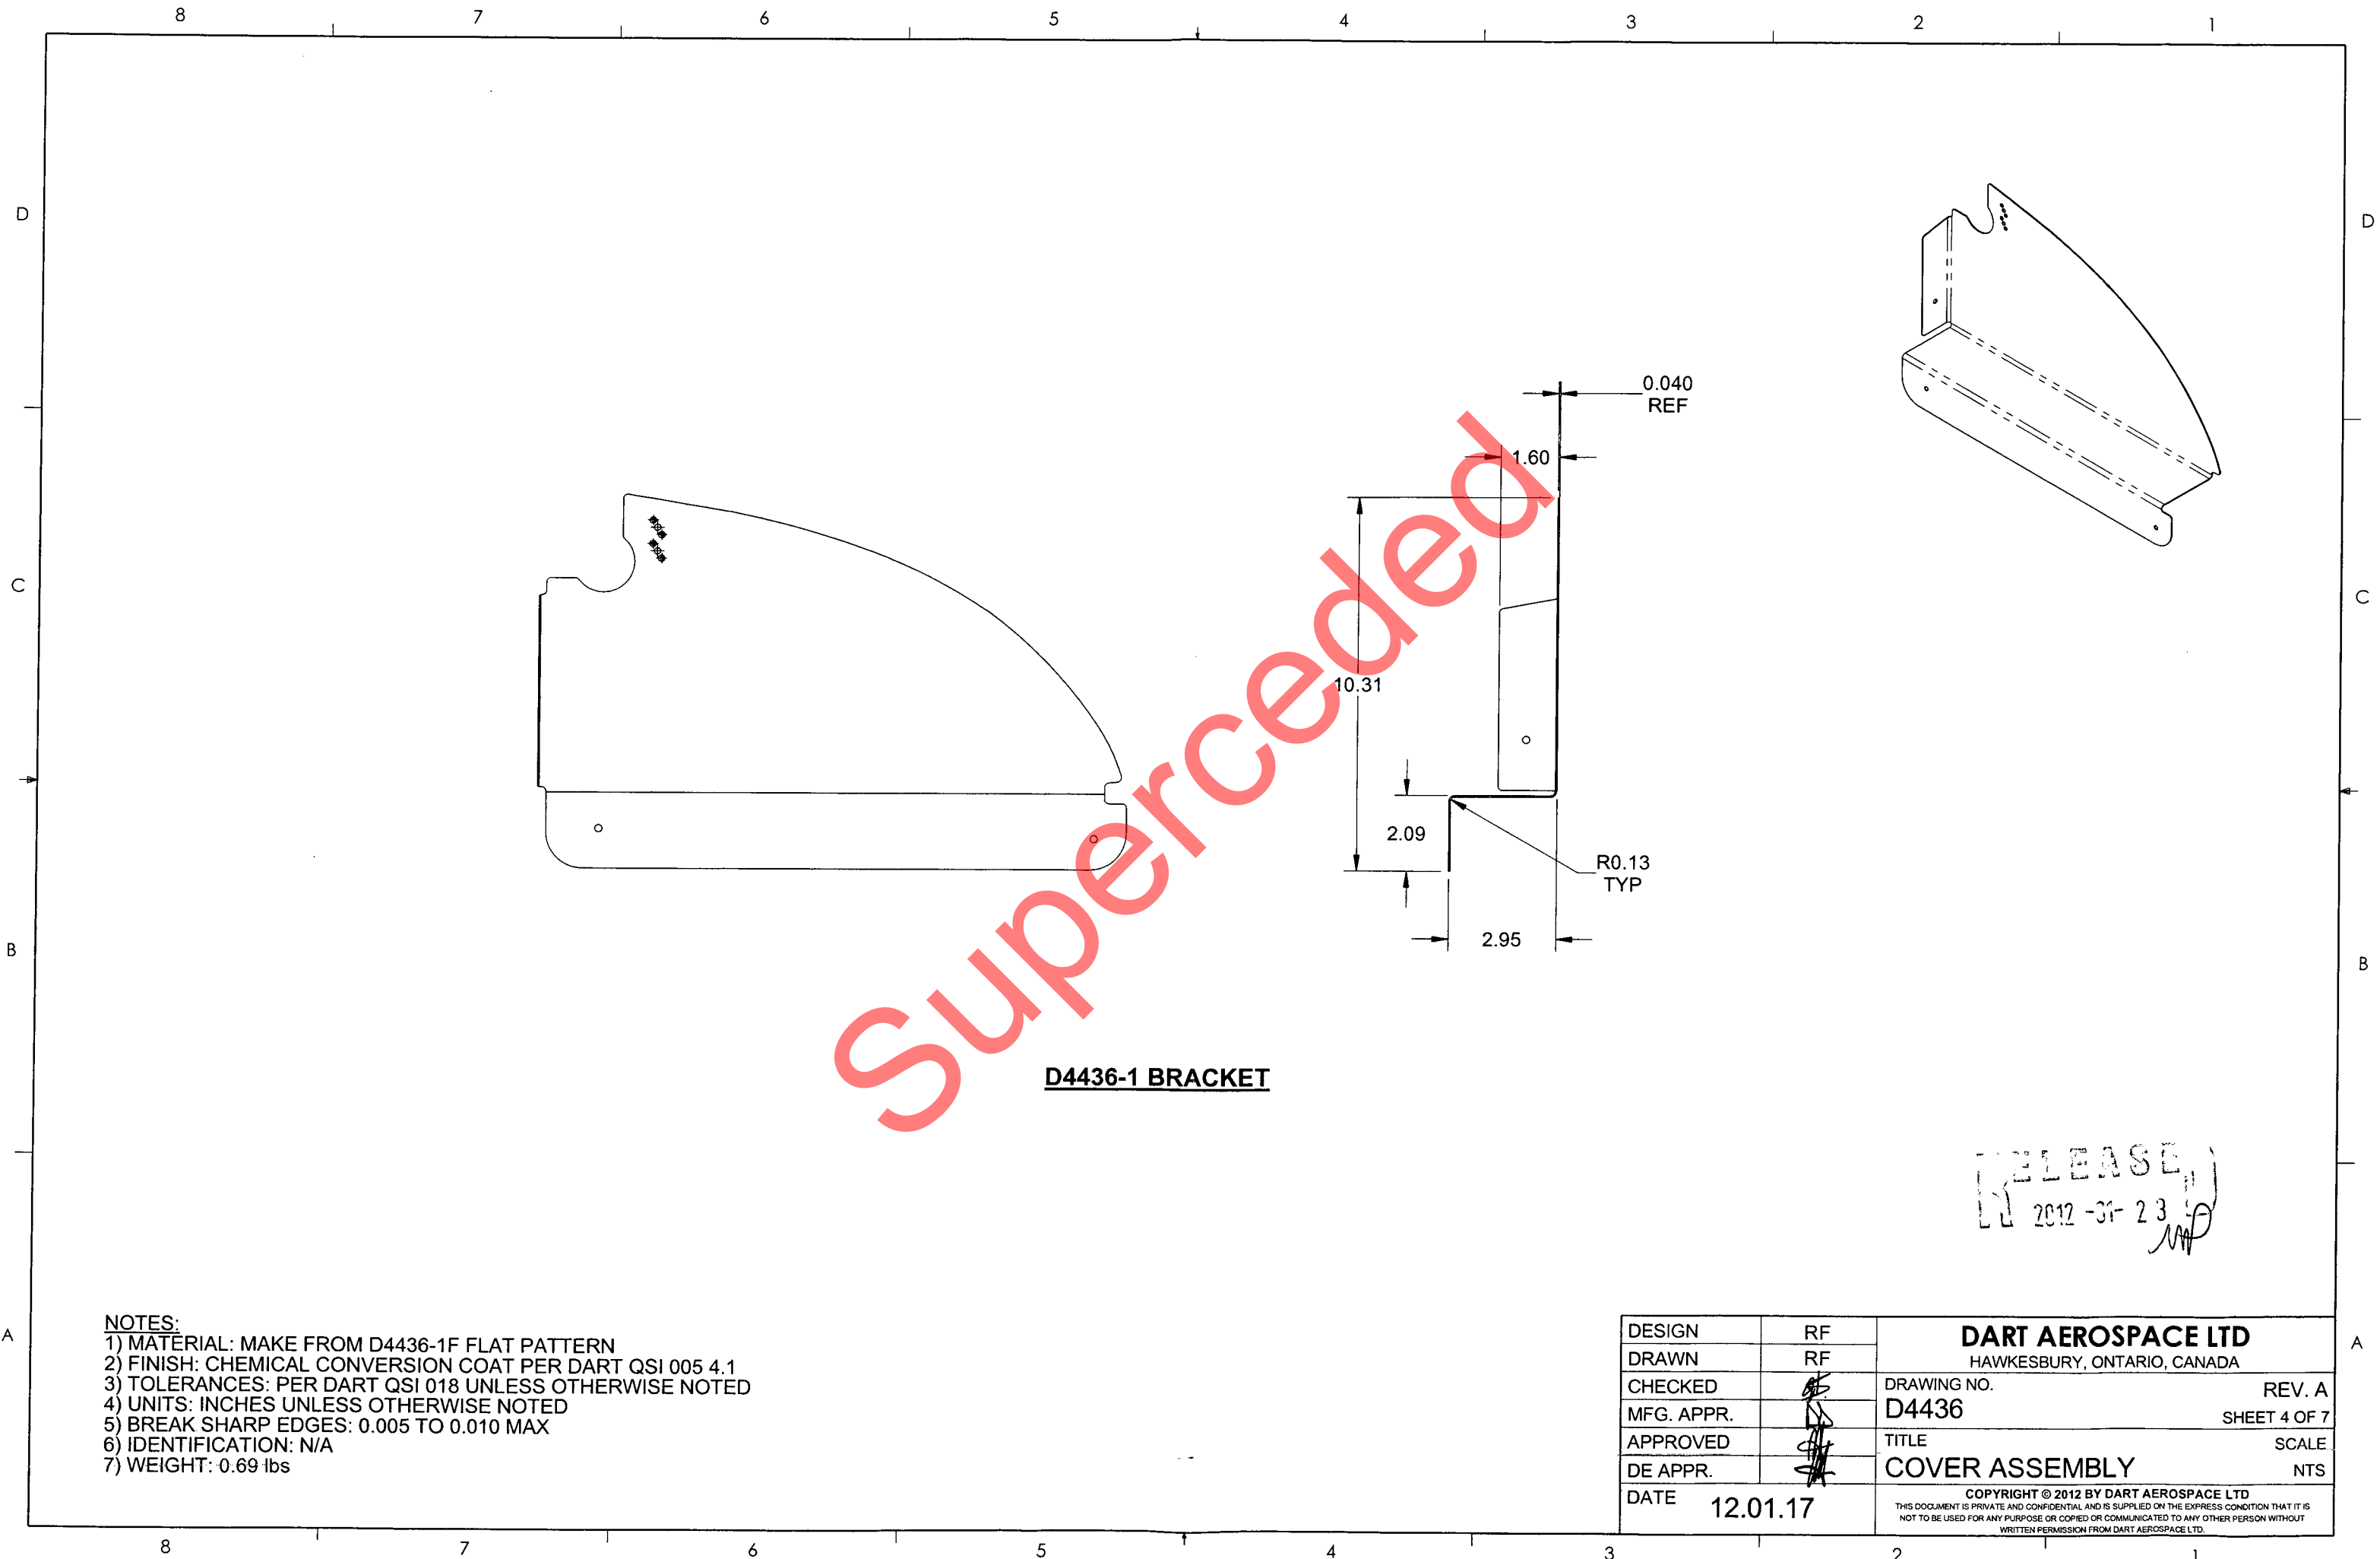


D4436-1 BRACKET


- NOTES:
- 1) MATERIAL: MAKE FROM D4436-1F FLAT PATTERN
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.69 lbs

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED		DRAWING NO.	REV. A
MFG. APPR.		D4436	SHEET 4 OF 7
APPROVED		TITLE	SCALE
DE APPR.		COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

RELEASE
2012-01-23

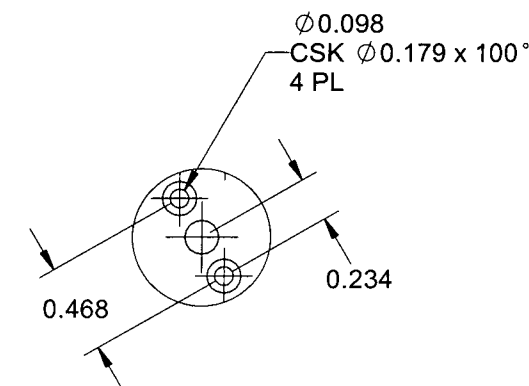

DETAIL A C6-6
SCALE 4X, TYP

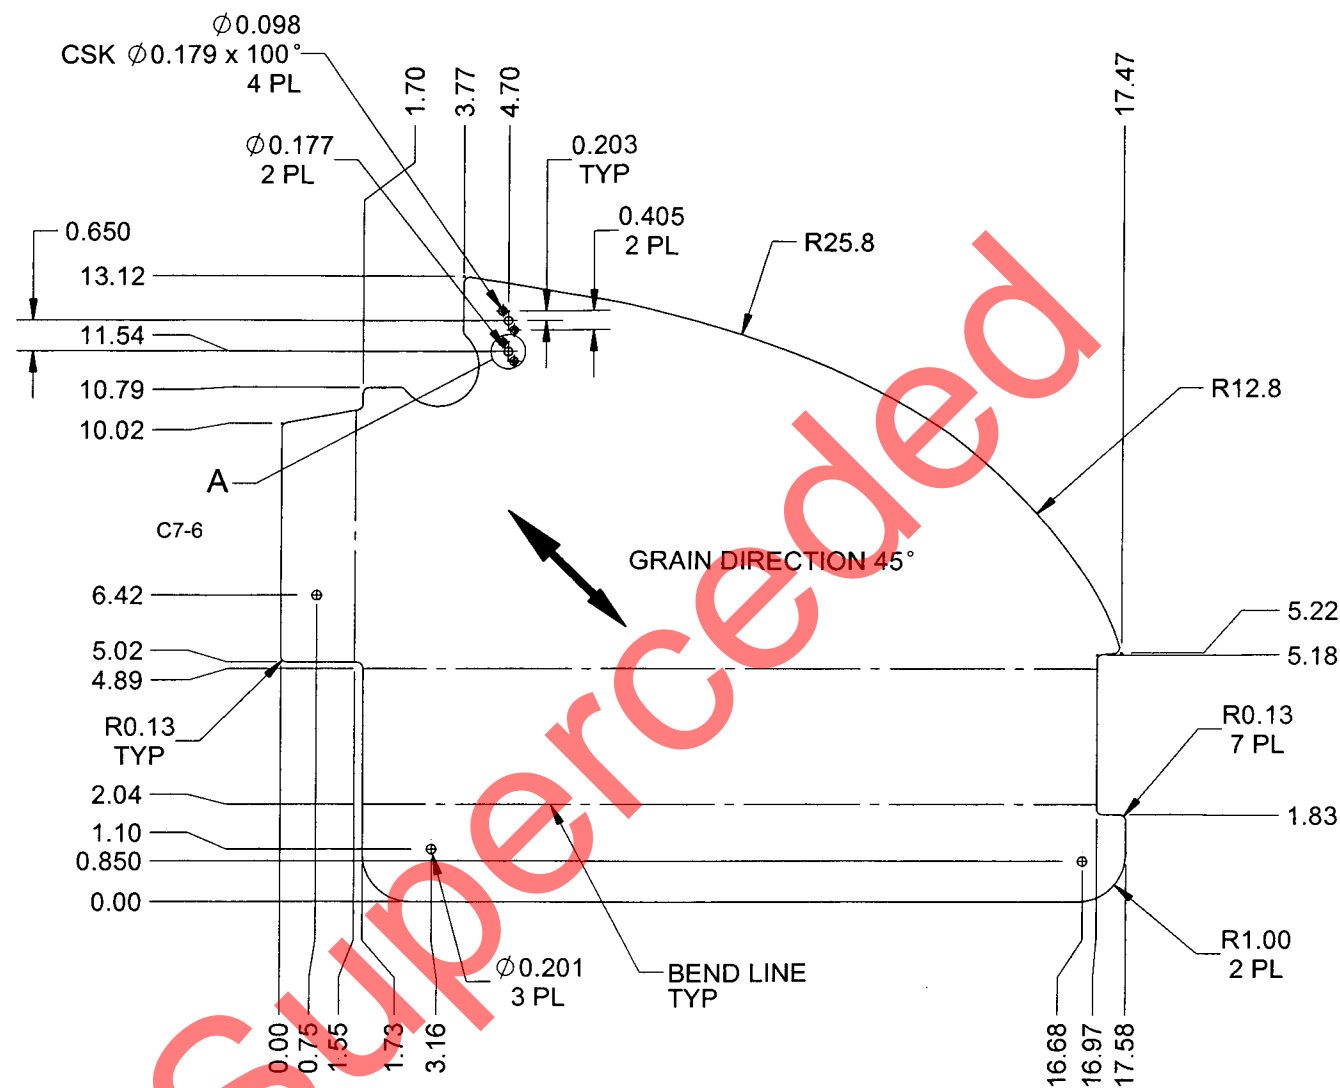

D4436-1F FLAT PATTERN

NOTES:

- 1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET 0.040 THICK
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC. M6061T6S.040
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: 0.69 lbs

RELEASED
2012-01-23

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED		DRAWING NO.	REV. A
MFG. APPR.		D4436	SHEET 5 OF 7
APPROVED		TITLE	SCALE
DE APPR.		COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

8 7 6 5 4 3 2 1

D

C

B





A

D

C

B

A

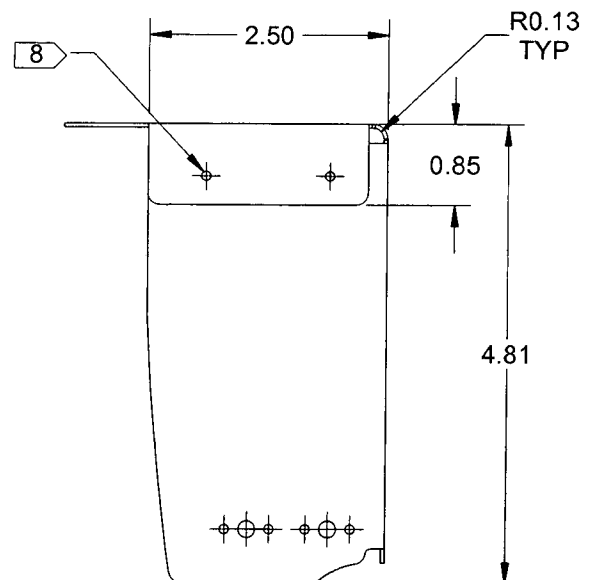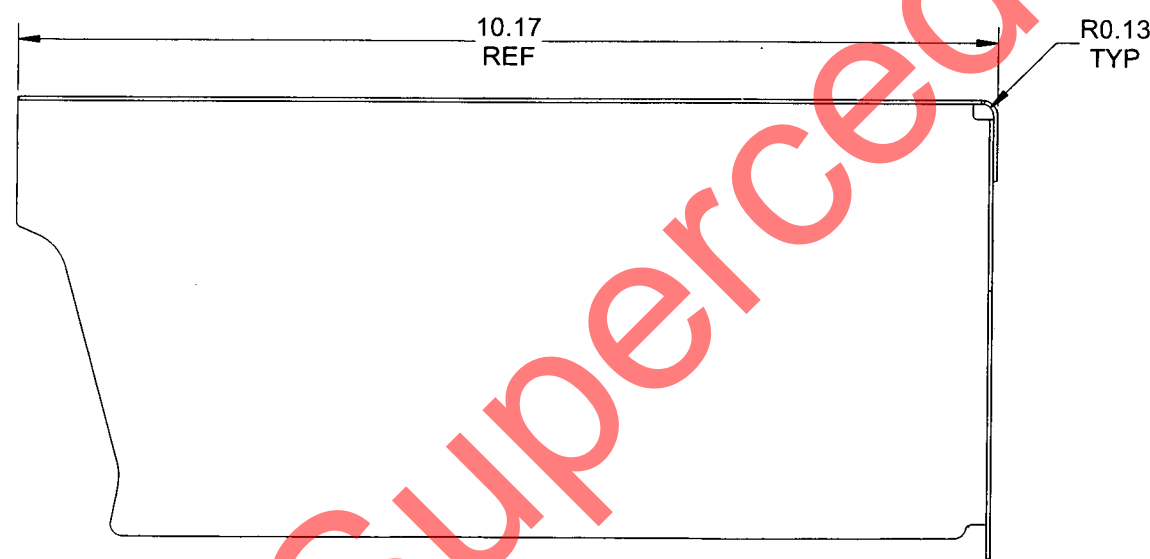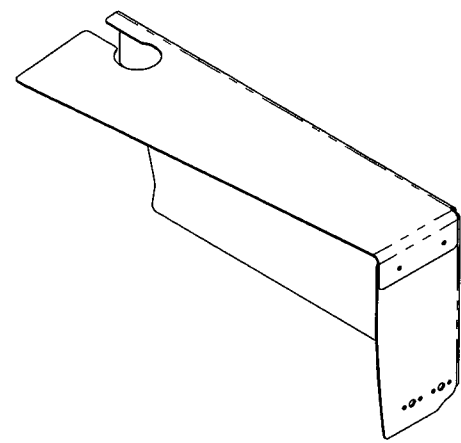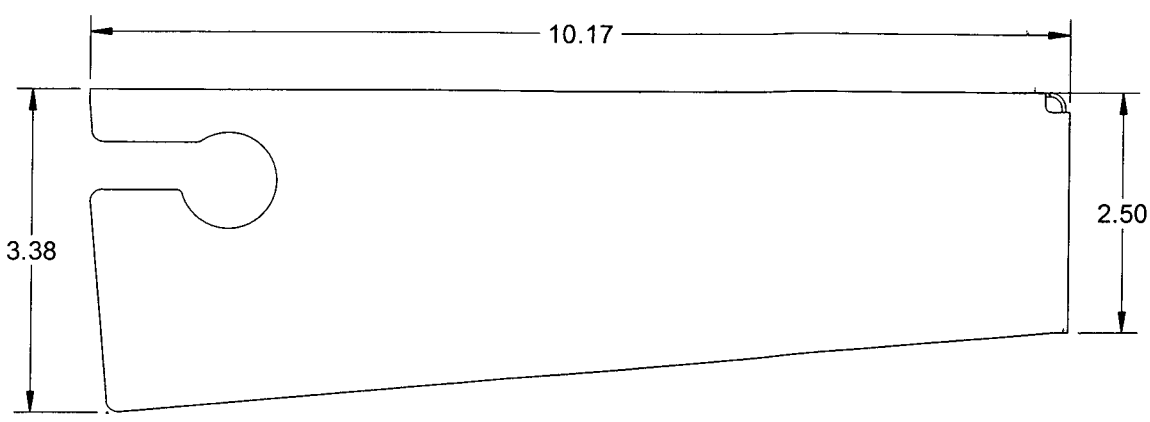



D4436-3 BRACKET

RELEASE
2012-01-23
MP

- NOTES:
- 1) MATERIAL: MAKE FROM D4436-3F FLAT PATTERN
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.33 lbs
 - 8) TRANSFER $\varnothing 0.129$ HOLES THRU 2 PLACES

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. A
MFG. APPR.	<i>[Signature]</i>	D4436	SHEET 6 OF 7
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

8 7 6 5 4 3 2 1

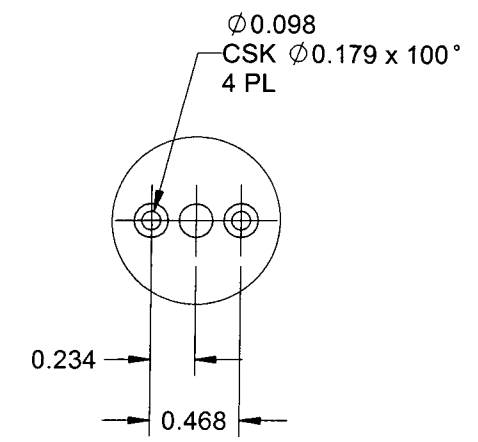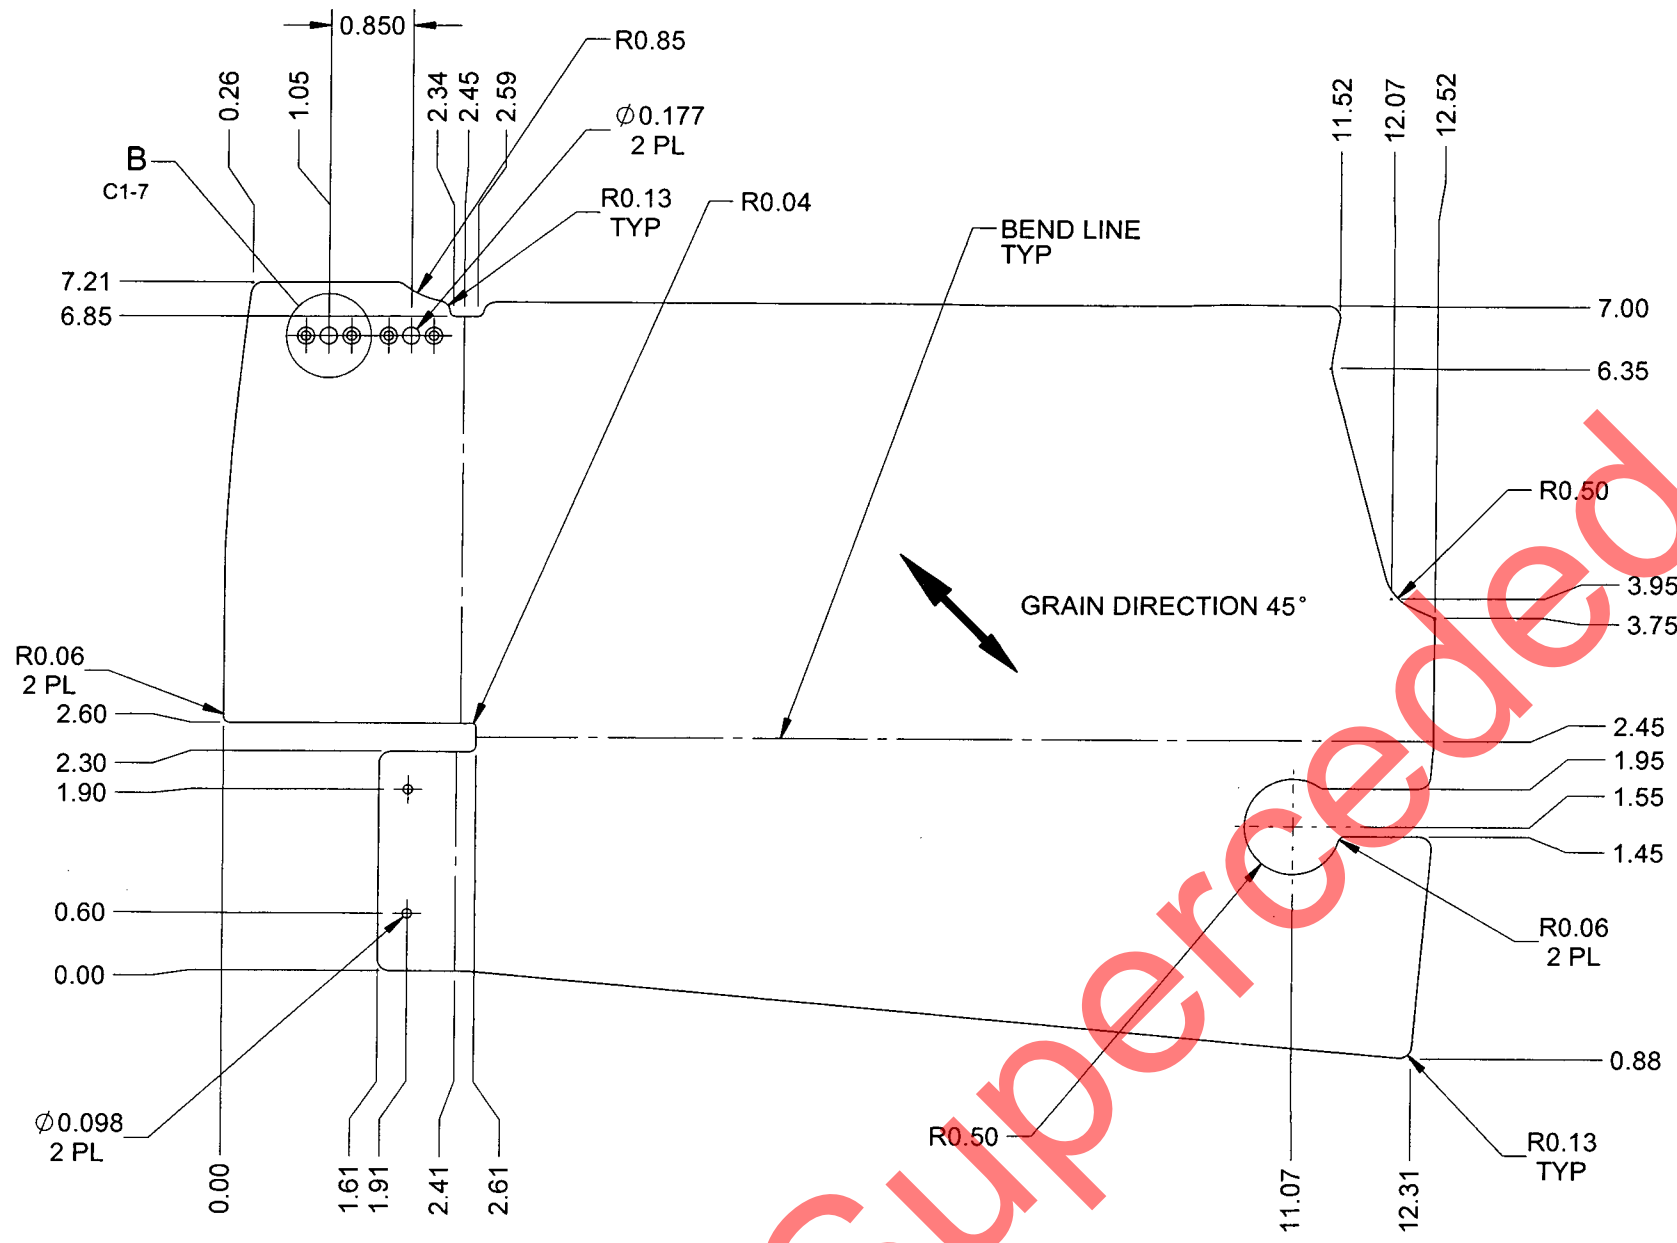

D4436-3F FLAT PATTERN

- NOTES:**
- 1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET 0.040 THICK
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC. M6061T6S.040
 - 2) FINISH: N/A
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.33 lbs

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED		DRAWING NO.	REV. A
MFG. APPR.		D4436	SHEET 7 OF 7
APPROVED		TITLE	SCALE
DE APPR.		COVER ASSEMBLY	NTS
DATE	12.01.17	COPYRIGHT © 2012 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

RELEASED
2012-01-23